




2909 siawood

Reliable sanding of solid wood and panel materials

2909 siawood

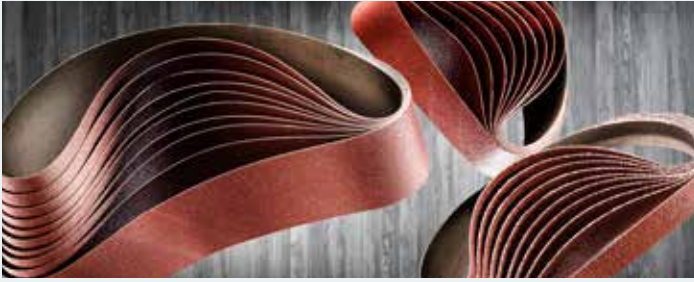

Product profile

Grit type: Aluminium oxide
Grit range: 36 – 320
Backing: x-wt cloth, polyester/cotton
Coating: Closed
Bonding: Resin over resin

Reliable sanding of solid wood and panel materials

The sanding belt with excellent price/performance ratio for optimum coarse to fine sanding: 2909 siawood always delivers convincing results.

Advantages

- High removal rate
- Aggressive cut
- High tear resistance
- Backing with very high strength and stability
- Long lifetime

Form

Hand sanding belts and sleeves; narrow belts, edge belts and long belts; fabric rolls; Jumbolino

Application

- Calibrating, intermediate and fine sanding of surfaces
- Flattening of edges and rabbets
- Calibrating solid wood
- Flush sanding of edges, edge bands and protrusions

Materials

Highly suitable for:
Soft wood, hard wood, resinous wood, plywood, MDF, chipboard
Can be also used for:
Old lacquer and paint, body filler, metal

Application



Edge belt sanding



Portable belt sander



Platen belt sanding



Slack-of-belt sanding



Stroke belt sanding



Rolls

Best Practice



2909 siawood is not produced in FEPA-standard – it is 1-2 grits coarser than known from other sia Abrasives products.
For example: A grit 150 of 2909 siawood is comparable with the roughness of a P120 from the 2920 siawood.



Your Key to a Perfect Surface