

for curves and profiles with radii from 10 mm

High dimensional accuracy and adaptability to contours and curves are enormously important in profile belt sanding – which is why we developed 2933 jo siatur. Further advantages: long life, good finish and suitability for pneumatic rolls.

Advantages

- Perfect surface finishes thanks to TopTec
- Dust-free process: antistatic construction gives low dust formation on belt, workpiece and machinery
- High level of dimensional accuracy during profile belt sanding
- Highly adaptable to contours, curves and profiles
- Long product life when sanding softwood and wood containing resins
- Suitable for pneumatic rollers



Applications


- Coarse sanding of curves and profiles
- Intermediate sanding of curves and profiles
- Final sanding of profiled workpieces
- Sanding off of old varnish
- Flush sanding of edges and protrusions
- Keying for preparation and re-working of surfaces and curves
- Profile grinding for radii greater than 10 mm

Product profile

Grit type: Semi-friable aluminium oxide
 Backing: j-wt cloth, cotton
 Coating: Electrostatic open bonding: resin over resin
 Equipment: TopTec

Properties



The following properties refer to the materials used in the main application:

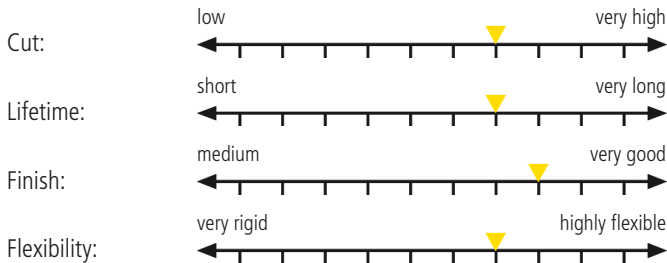

Materials

Soft wood; Hard wood; Resinous wood; Mineral material; Plywood panel; MDF board; Chipboard

Application

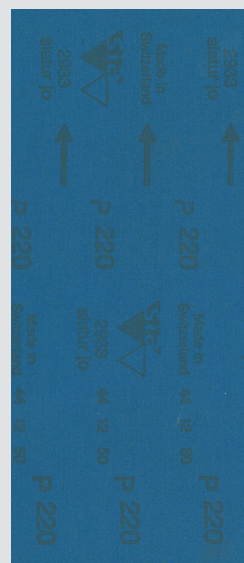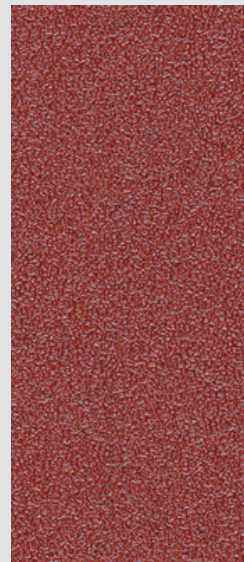

| | | | | |
|------|---|--|--|--|
| 16 | | | | |
| 20 | | | | |
| 24 | | | | |
| 30 | | | | |
| 36 | | | | |
| 40 | | | | |
| 50 | | | | |
| 60 | ■ | | | |
| 80 | ■ | | | |
| 100 | ■ | | | |
| 120 | ■ | | | |
| 150 | ■ | | | |
| 180 | ■ | | | |
| 220 | ■ | | | |
| 240 | | | | |
| 280 | | | | |
| 320 | | | | |
| 360 | | | | |
| 400 | | | | |
| 500 | | | | |
| 600 | | | | |
| 800 | | | | |
| 1000 | | | | |
| 1200 | | | | |
| 1500 | | | | |
| 2000 | | | | |
| 2500 | | | | |
| 3000 | | | | |
| 4000 | | | | |

plain
 siafast
 siaSoft
 SKF