

the special belt sanding series for coarse dry sanding

The special 2829 siaron y series is ideal for unalloyed steels and non-ferrous metals in stationary belt sanding applications and in applications involving the use of powerfile sanders. It ensures an excellent finish without sacrificing such advantages as high stock removal rates, high edge stability or tear resistance.



Advantages

- Backing with very high stability and rigidity
- Active additives with a cooling effect greatly reduce discolouration
- Suitable for general use in dry and wet sanding applications

Applications


- Weld preparation
- Removing discolouration
- Sanding down
- Surface treatment
- Deburring
- Smoothing and blending of flaws

Product profile

Grit type: Zirconia alumina
 Backing: x-wt cloth
 Coating: Closed
 bonding: resin over resin
 Coating: Cooling additive

Properties



The following properties refer to the materials used in the main application:

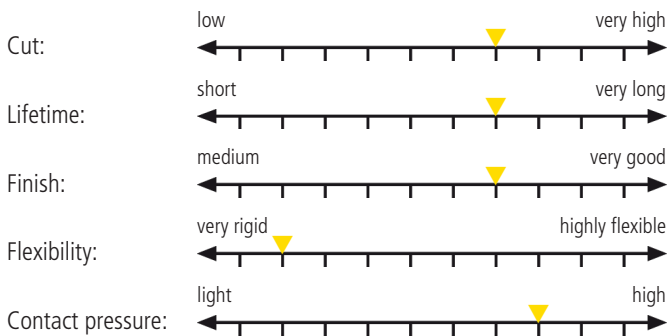

Materials

Unalloyed / low-alloy steel; Non-ferrous metals

Application

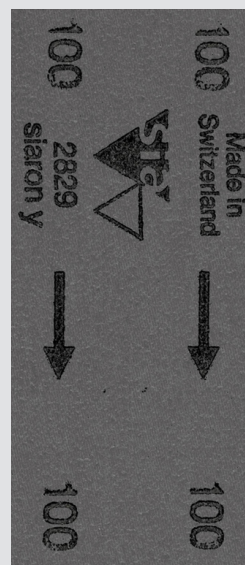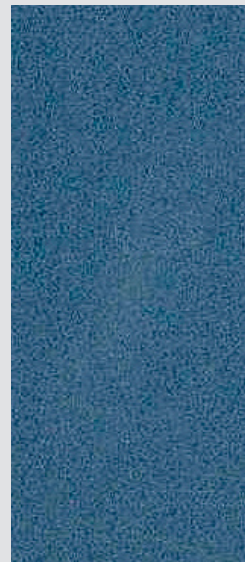

| | | | | |
|------|---|--|---|--|
| 16 | | | | |
| 20 | | | | |
| 24 | ■ | | | |
| 30 | | | | |
| 36 | ■ | | ■ | |
| 40 | ■ | | | |
| 50 | ■ | | | |
| 60 | ■ | | | |
| 80 | ■ | | | |
| 100 | ■ | | | |
| 120 | ■ | | | |
| 150 | | | | |
| 180 | | | | |
| 220 | | | | |
| 240 | | | | |
| 280 | | | | |
| 320 | | | | |
| 360 | | | | |
| 400 | | | | |
| 500 | | | | |
| 600 | | | | |
| 800 | | | | |
| 1000 | | | | |
| 1200 | | | | |
| 1500 | | | | |
| 2000 | | | | |
| 2500 | | | | |
| 3000 | | | | |
| 4000 | | | | |

plain
 siastart
 siastop
 SKF